


AK(Z) 950/.. - 5,0 (5,08) - green




**2-24 poles, Spacing 5,0 mm or 5,08 mm
insert required no. of poles ..**

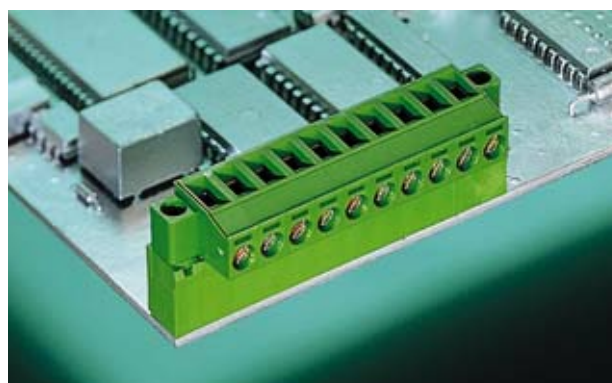

AK(Z) 950/.. F - 5,0 (5,08) - green

**2-10 poles, Spacing 5,0 mm or 5,08 mm
insert required no. of poles ..**

Ratings:

			
	UL 1059	CSA 22.2 No. 158	DIN VDE 0627
Rated Voltage	300 V	300 V	250 V
Rated Current	15 A	15 A	12 A (T60)
Wire Size	AWG 22-12	AWG 22-12	2,5 mm ²
Rating Impulse Voltage/Dirt Level			4 kV/3
Rated Torque / Screw Size			0,5 Nm/M3
Max. Rated Cross Section			
Single Wire (solid)			2,5 mm ²
Stranded Wire (flexible)			2,5 mm ²
Stranded wire with Ferrules			2,5 mm ²




Dimensions

Spacing	5,0 mm (5,08 mm)
Stripped Length	6,0 mm

Materials

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Terminal Block	CuZn
Contact	CuSn
Colour	green
	RAL 6018

Ratings:

			
	UL 1059	CSA 22.2 No. 158	DIN VDE 0627
Rated Voltage	300 V	300 V	250 V
Rated Current	15 A	15 A	12 A (T60)
Wire Size	AWG 28-12	AWG 28-12	2,5 mm ²
Rating Impulse Voltage/Dirt Level			4 kV/3
Rated Torque / Screw Size			0,5 Nm/M3
Max. Rated Cross Section			
Single Wire (solid)			2,5 mm ²
Stranded Wire (flexible)			2,5 mm ²
Stranded wire with Ferrules			2,5 mm ²

Dimensions

Spacing	5,0 mm (5,08 mm)
Stripped Length	6,0 mm

Materials

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Terminal Block	CuZn
Contact	CuSn
Colour	green
	RAL 6018